


**Name:** Adam Drake  
**Date:** Feb 2017  
**Track:** Fear Farm - DNC 2017

**Track Conditions**  
 Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy


**Result**  
 Race Time / Lap: \_\_\_\_\_  
 Best Lap (1Lap): \_\_\_\_\_

### Front Suspension




Rebound Stop: 104mm


Upright:  E2129  
 E2105-B  
 Tension Rod:  E2107A(Long)  
 E2107B(Short)  
 Upper Arm Position:

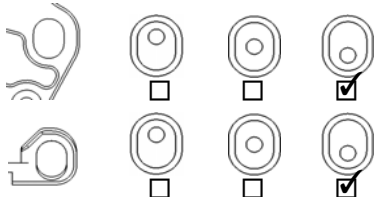


Ride Height: 25mm  
 Toe Angle: 2 out  
 Kingpin Ball Spacer(Upper): 1mm  
 (Lower): 1mm  
 Wheel Hub: 1mm  
 Anti Roll Bar: φ 2.3  
 Upper Arm Spacer: 2mm

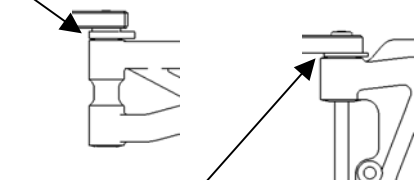


Lower Arm Spacer: 0mm  
 Lower Arm Position (Kick Up):

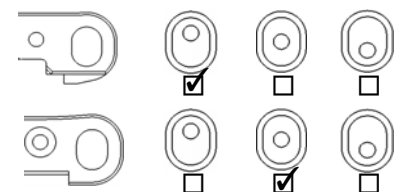

### Front Shocks




Piston: Flash Point 1.45x5  
 Oil: Flash Point 550  
 Spring: 9.0T

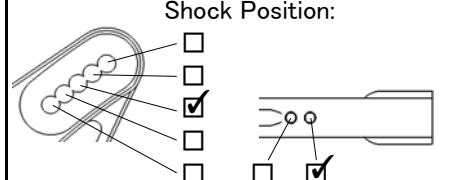


Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2502(Aluminum)  
 E2511(CFRP)

### Steering Ackerman

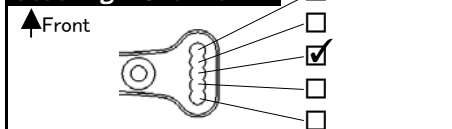


### Rear Suspension



Rebound Stop: 118.5


Upper Arm Position:




Lower Arm Position (Anti-Squat):



Ride Height: 26mm  
 Camber Angle: -3  
 Wheel Hub: 1mm  
 Anti Roll Bar: φ 2.5  
 Lower Arm Spacer: 0mm

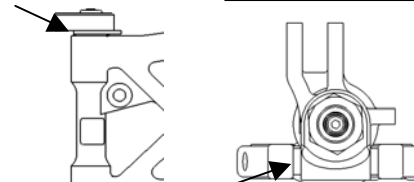


Upright Spacer: Middle  
 Upright:  E2131  
 Other \_\_\_\_\_  
 Lower Arm Position (Toe Angle):

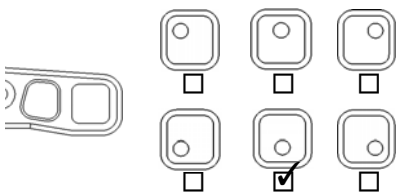

### Rear Shocks




Piston: Flash Point 1.45x5  
 Oil: Flash Point 400  
 Spring: 10.5T

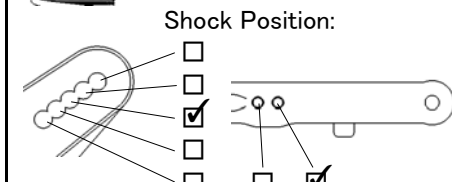

Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2522(Aluminum)  
 E2523(CFRP)

### Weight

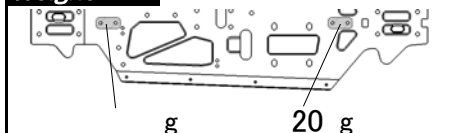

### Engine

Type: O.S. Speed B2102 Plug: O.S. P3  
 Gasket: Stock Reducer: 6.5mm  
 Muffler: O.S. 2090 Fuel: Flash Point 30%  
 Engine Mount:  E0701(Standard)  E2701(One Piece)

### Diff. Oil

Front: Flash Point 5,000 O-Ring: \_\_\_\_\_ pcs.  
 Center: Flash Point 7,000 \_\_\_\_\_ pcs.  
 Rear: Flash Point 3,000 \_\_\_\_\_ pcs.

### Tires


	Front	Rear
Type:	<u>Pro-Line ElectroShot</u>	<u>Pro-Line ElectroShot</u>
Compound:	<u>X3</u>	<u>X3</u>
Inserts:	<u>Pro-Line</u>	<u>Pro-Line</u>
Wheel:	<u>Pro-Line</u>	<u>Pro-Line</u>

### Clutch

Clutch Bell: 13T Spur Gear: 46T  
 Clutch Shoes: 4 shoe clutch  
 Clutch Spring: \_\_\_\_\_

### Body/Wing

Body: Pro-Line Predator  
 Wing: Pro-Line



### Comments

Flash Point brass pistons with 350R/500F shock oil at night.  
 E0220 front and rear CVA driveshafts.  
 Center universal driveshafts. Hard servo saver spring.  
 HT differentials front, center, and rear.