


**Name:** Kenji Tsuruta  
**Date:** 2017  
**Track:** RC LAND 23

**Track Conditions**  
 Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy


**Result**  
 Race Time / Lap: \_\_\_\_\_  
 Best Lap (1Lap): \_\_\_\_\_

### Front Suspension

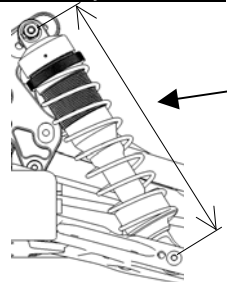


Rebound Stop: 104mm


Upright:  E2129  
 E2105-B  
 Tension Rod:  E2107A(Long)  
 E2107B(Short)  
 Upper Arm Position:

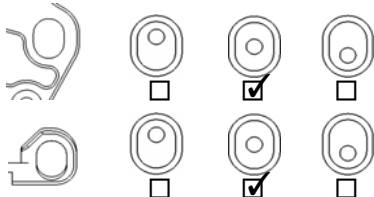


Ride Height: 24mm  
 Toe Angle: Out 1  
 Kingpin Ball Spacer(Upper): 1mm  
 (Lower): 1mm  
 Wheel Hub: 0mm  
 Anti Roll Bar: φ 2.2  
 Upper Arm Spacer: 2mm

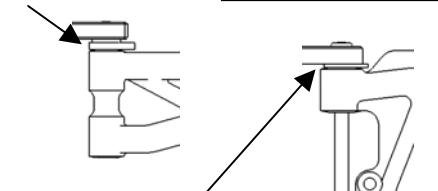

Lower Arm Spacer: 1  
 Lower Arm Position (Kick Up):

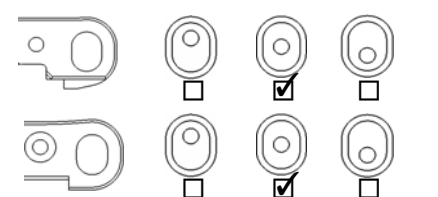


### Front Shocks



Piston: 1.3x8  
 Oil: #550  
 Spring: 1.6/10T 75mm


Shock Position:

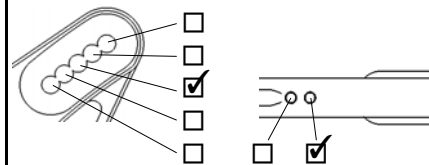


Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2502(Aluminum)  
 E2511(CFRP)

### Steering Ackerman

↑ Front




### Rear Suspension




Rebound Stop: 119mm


Upper Arm Position:




Lower Arm Position (Anti-Squat):




Ride Height: 29mm  
 Camber Angle: -2.5°  
 Wheel Hub: 1  
 Anti Roll Bar: φ 2.6  
 Lower Arm Spacer: 1mm

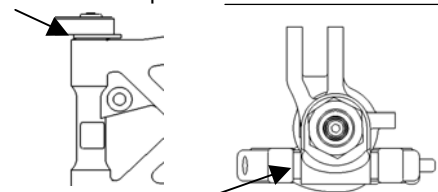

Upright Spacer: 0mm  
 Upright:  E2131  
 Other \_\_\_\_\_  
 Lower Arm Position (Toe Angle):

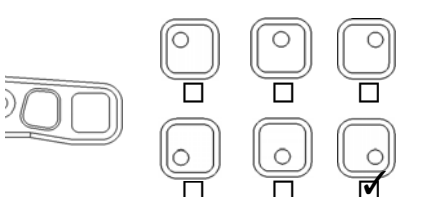


### Rear Shocks




Piston: 1.3x8  
 Oil: #500  
 Spring: 1.6/10.75T 86mm

Shock Position:

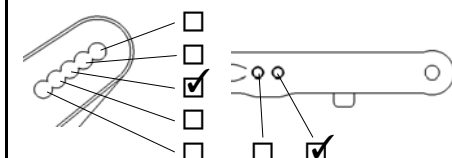

Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2522(Aluminum)  
 E2523(CFRP)

### Weight



### Engine

Type: Ninja JX21-B04 Plug: P4  
 Gasket: \_\_\_\_\_ Reducer: φ 6.5mm  
 Muffler: Ninja 2089 Fuel: Nitro-X  
 Engine Mount:  E0701(Standard)  E2701(One Piece)

### Diff. Oil

Front: #5,000 O-Ring: \_\_\_\_\_ pcs.  
 Center: #5,000 (HTD) \_\_\_\_\_ pcs.  
 Rear: #2,000 \_\_\_\_\_ pcs.

### Tires

	Front	Rear
Type:	<u>Proline Blockade</u>	<u>Proline Blockade</u>
Compound:	<u>M4</u>	<u>M4</u>
Inserts:	<u>Normal</u>	<u>Normal</u>
Wheel:	<u>Mugen</u>	<u>Mugen</u>

### Clutch

Clutch Bell: 13T Spur Gear: 48T  
 Clutch Shoes: C0754 x 1, E0710 x 2  
 Clutch Spring: φ 1.05 x 3

### Body/Wing

Body: Proline Predator Wing Position:     
 Wing: STD

### Comments

Center HT diff. \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_