

**Name:** \_\_\_\_\_  
**Date:** \_\_\_\_\_  
**Track:** \_\_\_\_\_


**Track Conditions**

Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy

**Result**


Race Time / Lap: \_\_\_\_\_  
 Best Lap (1Lap): \_\_\_\_\_

### Front Suspension

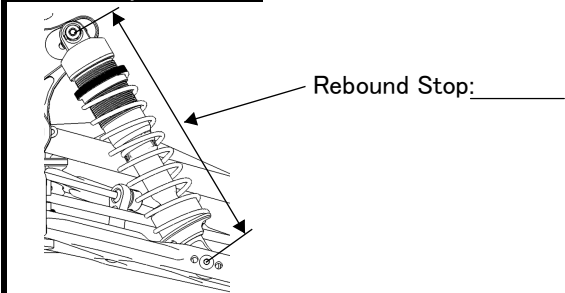


Tension Rod:  E2107A(Long)  
 E2107B(Short)

Upper Arm Position:

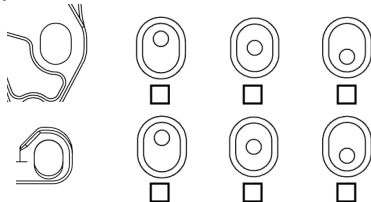


Ride Height: \_\_\_\_\_  
 Toe Angle: \_\_\_\_\_  
 Kingpin Ball Spacer: \_\_\_\_\_  
 Wheel Hub: \_\_\_\_\_  
 Anti Roll Bar: \_\_\_\_\_  
 Upper Arm Spacer: \_\_\_\_\_

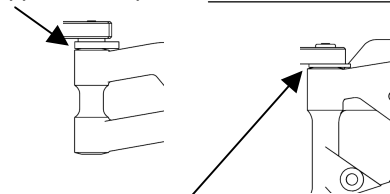


Lower Arm Spacer: \_\_\_\_\_

Lower Arm Position (Kick Up):

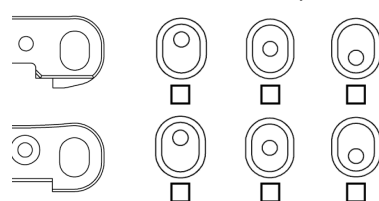


### Front Shocks

Piston: \_\_\_\_\_  
 Oil: \_\_\_\_\_  
 Spring: \_\_\_\_\_  
 Spring Adj: \_\_\_\_\_

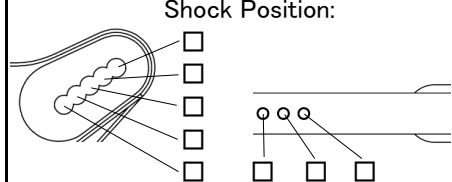


Pivot Ball Position:  Front  Rear


### Rear Suspension

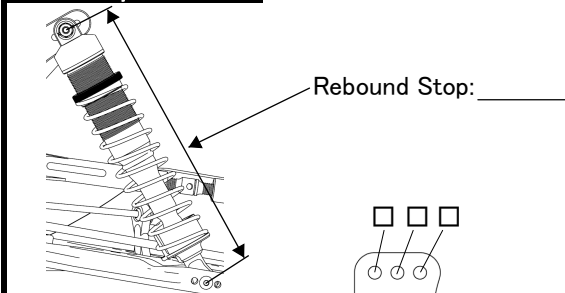


Upper Arm Position:

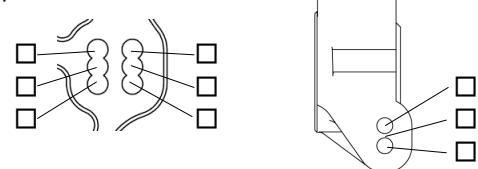


Lower Arm Position (Anti-Squat):



Ride Height: \_\_\_\_\_  
 Camber Angle: \_\_\_\_\_  
 Wheel Hub: \_\_\_\_\_  
 Anti Roll Bar: \_\_\_\_\_  
 Lower Arm Spacer: \_\_\_\_\_

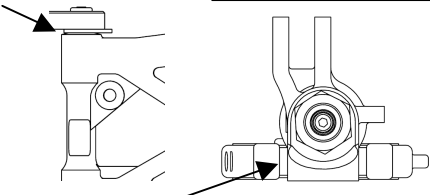


Upright Spacer: \_\_\_\_\_  
 Upright:  E2106-B  
 E2118(Aluminum)  
 Lower Arm Position (Toe Angle):

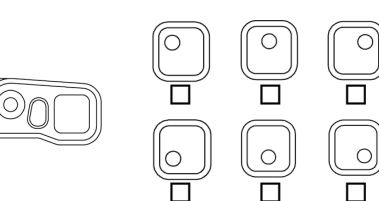

### Rear Shocks

Piston: \_\_\_\_\_  
 Oil: \_\_\_\_\_  
 Spring: \_\_\_\_\_  
 Spring Adj: \_\_\_\_\_

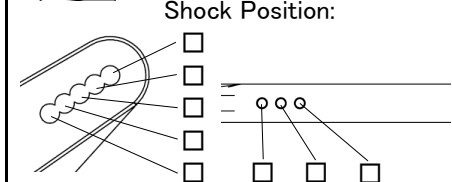

Pivot Ball Position:  Front  Rear

### Engine

Type: \_\_\_\_\_ Plug: \_\_\_\_\_  
 Gasket: \_\_\_\_\_ Reducer: \_\_\_\_\_  
 Muffler: \_\_\_\_\_ Fuel: \_\_\_\_\_  
 Engine Mount:  E0701(Standard)  E0703(One Piece)

### Diff. Oil

Front: \_\_\_\_\_ O-Ring: \_\_\_\_\_ pcs.  
 Center: \_\_\_\_\_ pcs.  
 Rear: \_\_\_\_\_ pcs.

### Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

### Clutch

Clutch Bell: \_\_\_\_\_ Spur Gear: \_\_\_\_\_  
 Clutch Shoes: \_\_\_\_\_  
 Clutch Spring: \_\_\_\_\_

### Body/Wing

Body: \_\_\_\_\_  
 Wing: \_\_\_\_\_

Wing Position:

### Comments

.....  
 .....  
 .....