

Name: Ryan Maifield
Date: Feb 2017
Track: Fear Farm - DNC 2017


Track Conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Result


Race Time / Lap: _____
 Best Lap (1Lap): _____

Front Suspension

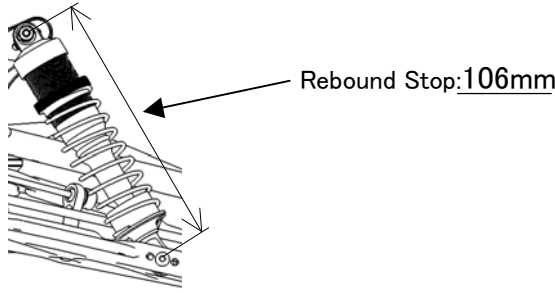


Upright: E2105-B
 E2129
 Tension Rod: E2107A(Long)
 E2107B(Short)


Upper Arm Position:

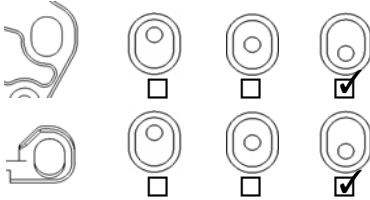


Ride Height: 37mm
 Toe Angle: 1 out
 Kingpin Ball Spacer(Upper): 1mm
 (Lower): 1mm
 Wheel Hub: E2214 (11.5mm)
 Anti Roll Bar: φ 2.4
 Upper Arm Spacer: 2mm

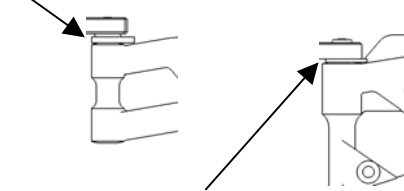

Lower Arm Spacer: 0mm
 Lower Arm Position (Kick Up):

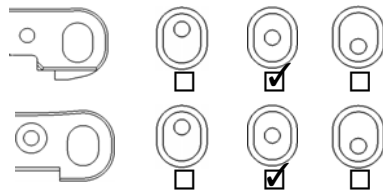


Front Shocks




Piston: Flash Point Brass 8 hole
 Oil: Flash Point 600
 Spring: φ 1.5/7.5T

Shock Position:

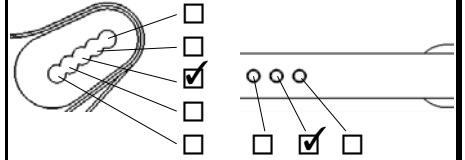


Pivot Ball Position: Front Rear

Rear Suspension

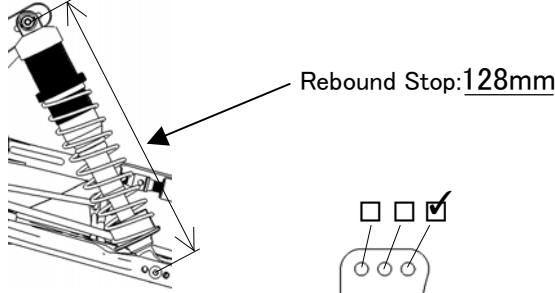


Upper Arm Position:




Lower Arm Position (Anti-Squat):




Ride Height: 39mm
 Camber Angle: -3
 Wheel Hub: E2214 (11.5mm)
 Anti Roll Bar: φ 2.9
 Lower Arm Spacer: 0mm

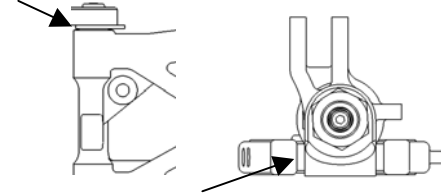

Upright Spacer: 1mm
 Upright: E2131(Plastic)
 E2134(Aluminum)
 Lower Arm Position (Toe Angle):

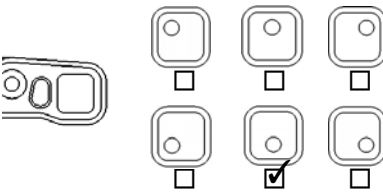


Rear Shocks



Piston: Flash Point Brass 8 hole
 Oil: Flash Point 550
 Spring: φ 1.5/7.75T

Shock Position:

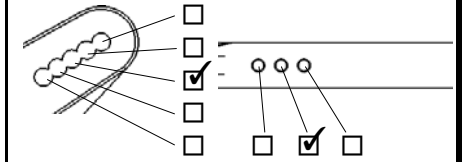

Pivot Ball Position: Front Rear

Engine

Type: Reds Racing Plug: Reds 5
 Gasket: _____ Reducer: 7.5mm
 Muffler: Reds 2104 with M header Fuel: Flash Point 30%
 Engine Mount: E0701(Standard) E2701(One Piece)

Diff. Oil

Front: Flash Point 10,000 O-Ring: _____ pcs.
 Center: Flash Point 10,000 _____ pcs.
 Rear: Flash Point 7,000 _____ pcs.

Tires

Front

Rear

Type: _____
 Compound: _____
 Inserts: _____
 Wheel: _____


Clutch

Clutch Bell: 13T 14T
 Spur Gear: 44T 46T 48T
 Clutch Shoes: _____
 Clutch Spring: _____

Body/Wing

Body: JC
 Wing: AE

Wing Position:



Comments

Center universal driveshafts.
 HT differentials front, center, and rear.

Weight

