

TRACK CONDITION

ENVIRONMENT: INDOOR ☐ OUTDOOR ☒
 COMPOSITION: CARPET ☐ ASPHALT ☒
 TRACTION: LOW ☐ MEDIUM ☐ HIGH ☒
 LAYOUT: SLOW ☐ MIXED ☐ FAST ☒
 SURFACE: BUMPY ☐ SMOOTH ☒
 NOTE: _____

ELECTRONICS

MOTOR: MUCH MORE 4.5T TIMING: 30
 PINION: 25 SPUR: 116
 ESC: MUC MORE
 BATTERY: ZOMBIE 6400
 SERVO: SANWA PGS-LH
 RECEIVER: SANWA 472

SHOCK ABSORBERS

FRONT REAR
 PISTON: 4 HOLE PISTON: 4 HOLE
 OIL: 450 OIL: 450
 SPRING: KIT SPRING: KIT
 REBOUND: 0 REBOUND: 0
 NOTE: _____

ANTI-ROLL BAR

FRONT: 1.2 ☐ 1.3 ☒ 1.4 ☐ 1.5 ☐
 REAR: 1.1 ☐ 1.2 ☒ 1.3 ☐ 1.4 ☐

TIRES & WHEELS

TIRE: SWEEP CONTROL
 INSERT: _____
 WHEEL: _____
 TREATMENT: _____
 NOTE: _____

FRONT REAR

 15 MIN. 15 MIN.


SERVO SAVER POSITION

FORWARD ☒ REARWARD ☐

TRANSMISSION HEIGHT


SPOOL DIFFERENTIAL
 HIGH ☒ HIGH ☒ OIL: 7000
 LOW ☐ LOW ☐

FLEX

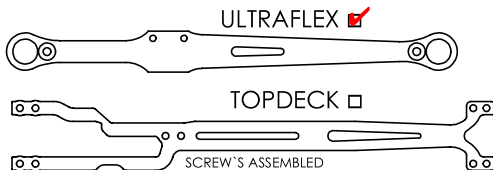


AERODYNAMICS

BODY: PF TYPE - S
 WING: ELITE HARD

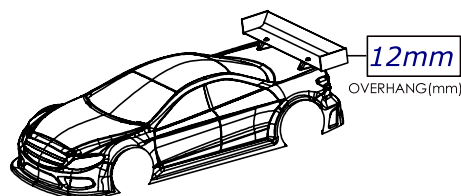


CASTER POSITION

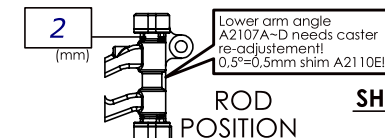


FF: A2105A/A2104
 1pc. ● 2pcs. ○

FR: A2105B/A2104
 1pc. ○ 2pcs. ●




UPPER ARM POSITION

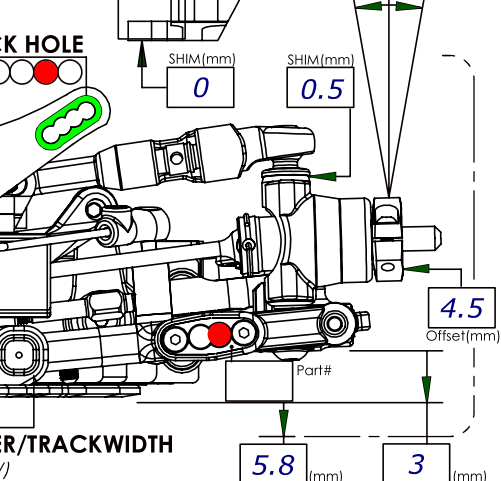

ROLL CENTER/TRACKWIDTH


(LEFT SIDE VIEW) RIDE HEIGHT 5.8 (mm) DOWNSTOP 3 (mm)

CAMBER LINK POSITION



RF: A2106B/A2104
 1pc. ○ 2pcs. ●


RR: A2106A/A2104
 1pc. ● 2pcs. ○





ROLL CENTER/TOE IN/ TRACK WIDTH

(RIGHT SIDE VIEW) RIDE HEIGHT 6.8 (mm) DOWNSTOP 4 (mm)

A2404



A2405

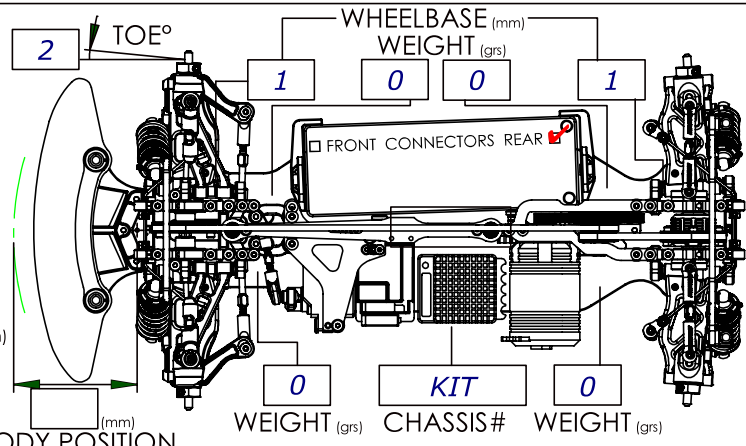

STEERING SHAFT MOUNTED ON

☐ SERVOPLATE
☒ CHASSIS

STEERING STOPPER

A2304/A2305/A2306
☐ Ø5 ☐ Ø5.5 ☐ Ø6 ☒ NO

NOTES: