


Name: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Track: \_\_\_\_\_

### Track Conditions


Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy

### Front Suspension

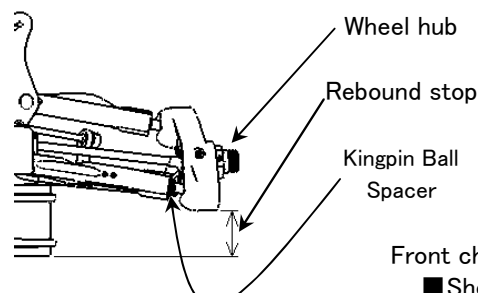

Front ride height 23 mm  
 Kingpin ball spacer 0 mm  
 Camber angle 1 °  
 Upper arm spacer 2 mm  
 Toe angle 1 °  
 Rebound stop 108 mm  
 Anti-roll bar  $\phi$  2.3 mm  
 Wheel Hub STD mm  
 Lower arm mount (Kick up)

Front chassis stiffener  
 Short (Std EU)  Long (Std EU)  1

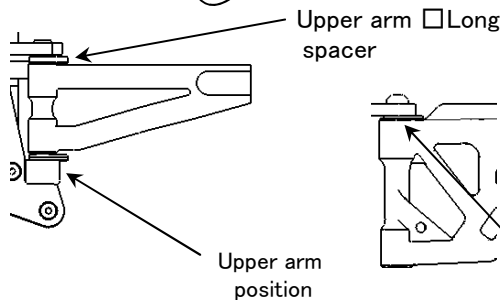

Lower arm plate (E0154A)


Upper arm position (E0148B, E0148C)

Lower arm spacer \_\_\_\_\_ mm

### Front Shocks




Piston Stock  
 Oil # 450  
 Spring L75-8.25  
 Spring adjustment \_\_\_\_\_ mm



### Steering Ackerman



### Rear Suspension

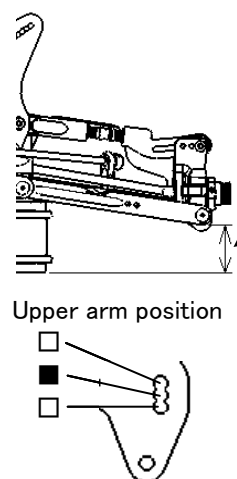

Rear ride height 26 mm  
 Camber angle 2 °  
 Lower arm mount  E0185(Aluminium)  E0185(Ally)


(Anti-squat)  0  1 (Toe angle) 2.5 °

Rebound stop 126 mm  
 Anti-roll bar  $\phi$  2.8 mm


Rear chassis stiffener Anti-squat (E0111C, E0111D)  Short (Ally)  Long (Std EU)

Upper arm position    Upright  E0152  E0173(Aluminium)


Wheelbase adjustment 1 mm

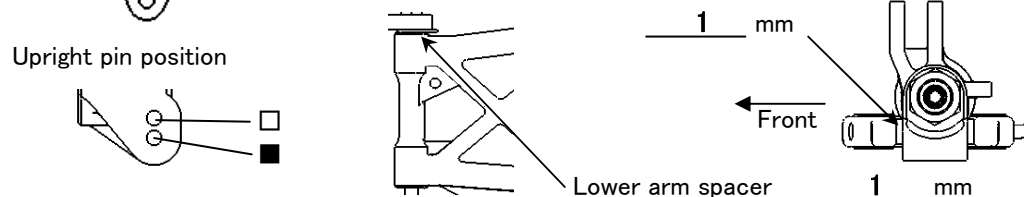


### Rear Shocks



Piston Stock  
 Oil # 400  
 Spring L86-8.25  
 Spring adjustment \_\_\_\_\_ mm



### Wing Position



**Engine** Type \_\_\_\_\_  
 Gasket \_\_\_\_\_ mm Reducer  $\phi$  \_\_\_\_\_  
 Plug \_\_\_\_\_ Fuel \_\_\_\_\_  
 Muffler \_\_\_\_\_

**Diff. Oil**  
 Front # 7000 O-Ring 0 pcs.  Other \_\_\_\_\_  
 Center # 7000 0 pcs.  Other \_\_\_\_\_  
 Rear # 3000 0 pcs.  Other \_\_\_\_\_

**Tire**  

<b>Front</b>		<b>Rear</b>
Type _____		Type _____
Foam _____		Foam _____

**Clutch**  
 Clutch shoes  Aluminium \_\_\_\_\_  
 Other \_\_\_\_\_  
 Spring 1.0 mm  
 Clutch bell / Spur gear 13T / 44T

**Result**  
 Race time / Lap \_\_\_\_\_  
 Best lap (1Lap) \_\_\_\_\_

**Comments:**  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_