

**Name:** \_\_\_\_\_  
**Date:** \_\_\_\_\_  
**Track:** \_\_\_\_\_


**Track Conditions**

Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy


**Result**

Race Time / Lap: \_\_\_\_\_  
 Best Lap (1Lap): \_\_\_\_\_


### Front Suspension

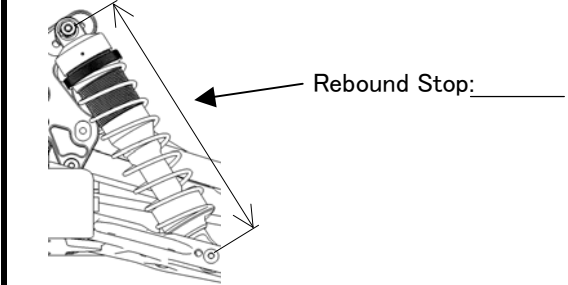


Upright:  E2129  
 E2105-B  
 Tension Rod:  E2107A(Long)  
 E2107B(Short)  
 Upper Arm Position:

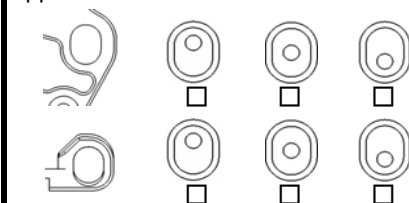

Ride Height: \_\_\_\_\_  
 Toe Angle: \_\_\_\_\_  
 Kingpin Ball Spacer(Upper): \_\_\_\_\_  
 (Lower): \_\_\_\_\_  
 Wheel Hub: \_\_\_\_\_  
 Anti Roll Bar: \_\_\_\_\_  
 Upper Arm Spacer: \_\_\_\_\_

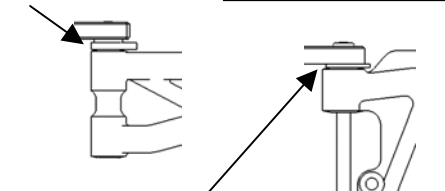


Lower Arm Spacer: \_\_\_\_\_  
 Lower Arm Position (Kick Up):

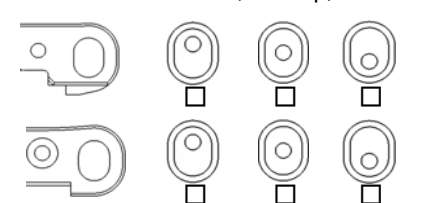




### Front Shocks

Piston: \_\_\_\_\_  
 Oil: \_\_\_\_\_  
 Spring: \_\_\_\_\_

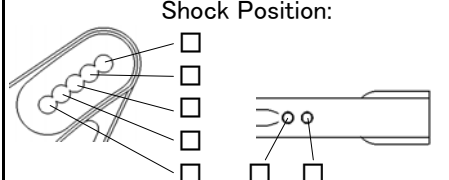


Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2502(Aluminum)  
 E2511(CFRP)


### Rear Suspension

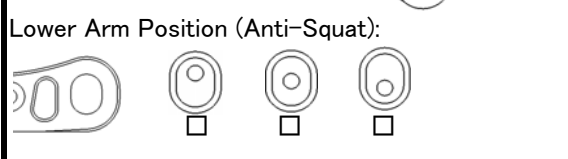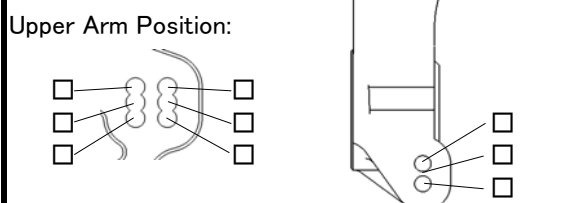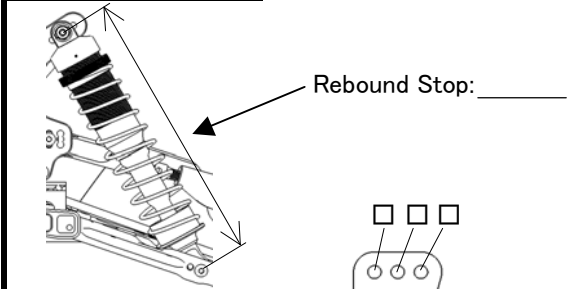

Ride Height: \_\_\_\_\_  
 Camber Angle: \_\_\_\_\_  
 Wheel Hub: \_\_\_\_\_  
 Anti Roll Bar: \_\_\_\_\_  
 Lower Arm Spacer: \_\_\_\_\_

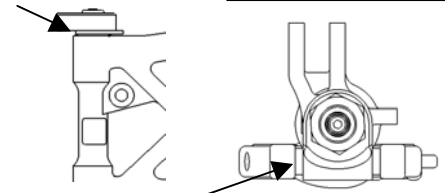


Upright Spacer:  
 Upright:  E2131  
 Other \_\_\_\_\_  
 Lower Arm Position (Toe Angle):

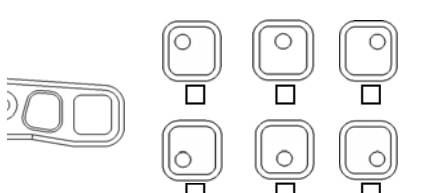


### Rear Shocks

Piston: \_\_\_\_\_  
 Oil: \_\_\_\_\_  
 Spring: \_\_\_\_\_

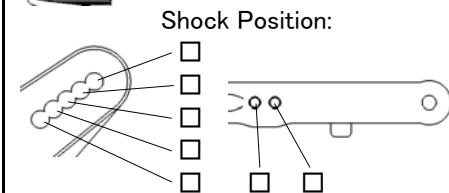

Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2522(Aluminum)  
 E2523(CFRP)

### Weight

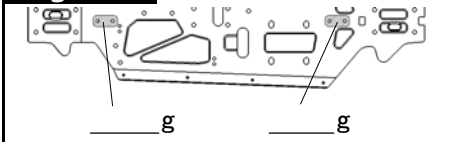

### Engine

Type: \_\_\_\_\_ Plug: \_\_\_\_\_  
 Gasket: \_\_\_\_\_ Reducer: \_\_\_\_\_  
 Muffler: \_\_\_\_\_ Fuel: \_\_\_\_\_  
 Engine Mount:  E0701(Standard)  E2701(One Piece)

### Diff. Oil

Front: \_\_\_\_\_ O-Ring: \_\_\_\_\_ pcs.  
 Center: \_\_\_\_\_ pcs.  
 Rear: \_\_\_\_\_ pcs.


### Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

### Clutch

Clutch Bell: \_\_\_\_\_ Spur Gear: \_\_\_\_\_  
 Clutch Shoes: \_\_\_\_\_  
 Clutch Spring: \_\_\_\_\_

### Body/Wing

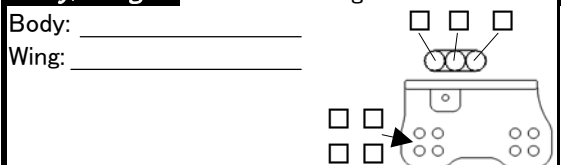

### Comments

.....  
 .....  
 .....