


**Name:** \_\_\_\_\_  
**Date:** \_\_\_\_\_  
**Track:** \_\_\_\_\_

### Track Conditions

Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy

### Front Suspension

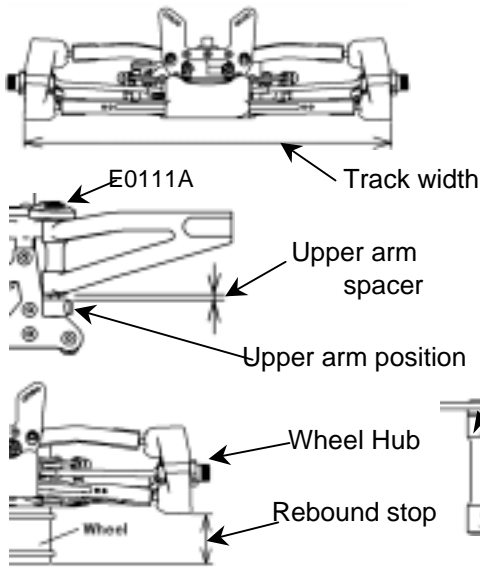


Track width \_\_\_\_\_ mm  
 Camber angle \_\_\_\_\_ °  
 Upper arm spacer \_\_\_\_\_ mm  
 Toe angle \_\_\_\_\_ °  
 Rebound stop \_\_\_\_\_ mm  
 Anti-roll bar \_\_\_\_\_ mm  
 Wheel Hub \_\_\_\_\_ mm  
 Lower arm mount (Kick up) \_\_\_\_\_ °  
 Upper arm position (E0111A)    
 E0106A - E0106B (High)  
 E0106C - E0106D (Low)  
 Lower arm spacer \_\_\_\_\_ mm


### Front Shocks

Piston \_\_\_\_\_  
 Oil # \_\_\_\_\_  
 Spring \_\_\_\_\_  
 Spacer \_\_\_\_\_ mm  
 Shock position

### Steering Ackerman



### Rear Suspension

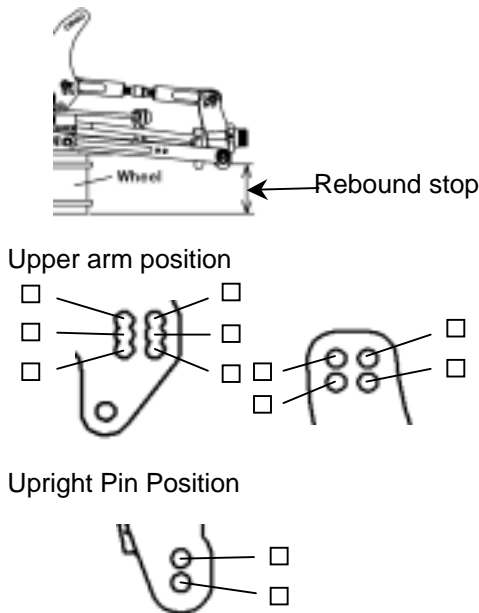


Camber angle \_\_\_\_\_ °  
 Lower arm mount (Toe angle) \_\_\_\_\_ °  
 Rebound stop \_\_\_\_\_ mm  
 Anti-roll bar \_\_\_\_\_ mm  
 Anti-squat (E0111C, E0111D)     
 Upright  E0110  
 E0126(Aluminium)  
 Wheelbase adjustment \_\_\_\_\_ mm  
 Front

### Rear Shocks

Piston \_\_\_\_\_  
 Oil # \_\_\_\_\_  
 Spring \_\_\_\_\_  
 Spacer \_\_\_\_\_ mm  
 Shock position

### Wing Position



**Engine** Type \_\_\_\_\_  
 Gasket \_\_\_\_\_ mm Reducer  $\phi$  \_\_\_\_\_  
 Plug \_\_\_\_\_ Fuel \_\_\_\_\_  
 Muffler \_\_\_\_\_

**Diff. Oil**  
 Front # \_\_\_\_\_ O-Ring \_\_\_\_\_ pcs.  Other \_\_\_\_\_  
 Center # \_\_\_\_\_ \_\_\_\_\_ pcs.  Other \_\_\_\_\_  
 Rear # \_\_\_\_\_ \_\_\_\_\_ pcs.  Other \_\_\_\_\_

**Tire**

Front	Rear
Type _____	Type _____
Foam _____	Foam _____

**Clutch**

Clutch shoes  Aluminium  Other \_\_\_\_\_  
 Spring \_\_\_\_\_ mm  
 Clutch bell / Spur gear \_\_\_\_\_ / \_\_\_\_\_

**Result**  
 Race time / Lap \_\_\_\_\_  
 Best lap (1Lap) \_\_\_\_\_

**Comments:**  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_