


Name: Mike Swauger
Date: 2/14/2004
Track: Ft. Myers, Florida, USA

Track Conditions


Size:	<input type="checkbox"/> Open	<input checked="" type="checkbox"/> Med.	<input type="checkbox"/> Tight
Traction:	<input type="checkbox"/> High	<input checked="" type="checkbox"/> Med.	<input type="checkbox"/> Low
Surface:	<input type="checkbox"/> Smooth	<input checked="" type="checkbox"/> Med.	<input type="checkbox"/> Bumpy

Front suspension

Track width 253 mm
Ride height 5 mm
Camber angle 1.5 °
Caster angle 2 mm
Toe angle 1 out °
Rebound stop 1 mm
Bump stop
 None Use

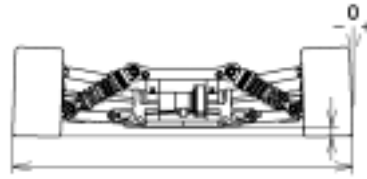


Rebound stop



Anti-roll bar

Caster Angle



Front shocks

Piston 1.2x1
Oil # 600
Spring White

Shock position




Steering Ackerman (H0364)


A B C

Rear suspension

Track width 263 mm
Ride height 6 mm
Camber angle -3 °
Toe angle 2 °
Rebound stop 8 mm
Bump stop
 None Use
Anti-roll bar Wire _____ mm Adjustable
Lower arm position
 5.5mm(A-C) 6.5mm(B-D)
H0180 Position 1.5 mm

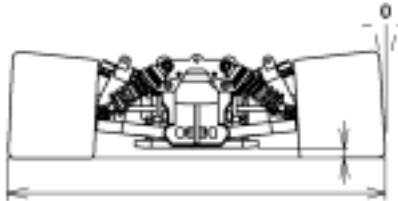

Rebound stop



Lower arm position

5.5mm(A-C) 6.5mm(B-D)

H0180 Position 1.5 mm

H0180 Position



Rear shocks

Piston Stock
Oil # 600
Spring White

Shock position



Engine Type RX21 RACE JP
Gasket 0.6 mm Muffler 086
Plug C7Tf Fuel Mugen Seiki Racing Fuel
Reducer 9

Clutch Clutch shoes Black Gray Red
Centrifugal shoe Light
Spring Silver
Clutch bell clearance 0.5 mm
Spring Adj. Nut position _____ mm

Tire Front Type Kawahara 35 Rear Type Kawahara 35
Dia.(start) L 66 /R 66 Dia.(start) L 73 /R 73
Dia.(finish) L /R Dia.(finish) L /R

Brake pad
 Black Yellow

Body Type Ms Lola WC
Body position Forward mm Rear spoile 7 mm

Drive ratio Gear ratio
 1st 16 / 49 Pully A (25 or 26) 25T 26T
2nd 20 / 47

Result
Race time / Lap _____
Best lap (1Lap) _____

Comments:
.....
.....
.....