


Name: Masao Tanaka
Date: 2/14/2004
Track: Ft. Myers, Florida, USA

Track Conditions


Size:	<input type="checkbox"/> Open	<input checked="" type="checkbox"/> Med.	<input type="checkbox"/> Tight
Traction:	<input checked="" type="checkbox"/> High	<input type="checkbox"/> Med.	<input type="checkbox"/> Low
Surface:	<input checked="" type="checkbox"/> Smooth	<input type="checkbox"/> Med.	<input type="checkbox"/> Bumpy

Front suspension


Track width 253 mm
 Ride height 8 mm
 Camber angle -2 °
 Caster angle 2 mm
 Toe angle out 1 °
 Rebound stop +2 mm
 Bump stop
 None Use
 Anti-roll bar

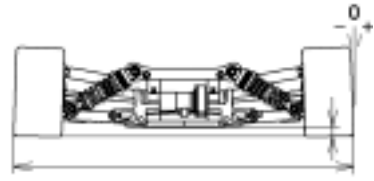

Rebound stop



Caster Angle



Front shocks

Piston 1.3x1
 Oil # 600
 Spring Serpent Blue

Shock position




Steering Ackerman (H0364)


A B C

Rear suspension

Track width 263 mm
 Ride height 10 mm
 Camber angle -3 °
 Toe angle in 2 °
 Rebound stop +9 mm
 Bump stop
 None Use
 Anti-roll bar Wire 3 mm Adjustable
 Lower arm position
 5.5mm(A-C) 6.5mm(B-D)
 H0180 Position 4 mm

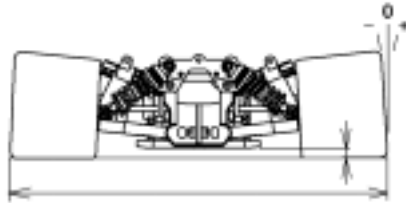

Rebound stop



H0180 Position



Rear shocks

Piston 1.1x2
 Oil # 600
 Spring Serpent Blue

Shock position



Engine

Type RX21 RACE WC JP
 Gasket 0.6 mm Muffler Novarossi 086
 Plug 8Tf Fuel Mugen Seiki Racing Fuel
 Reducer _____

Clutch

Clutch shoes Black Gray Red
 Centrifugal shoe Light
 Spring S. Hard
 Clutch bell clearance 0.5 mm
 Spring Adj. Nut position 0.9 mm

Tire

Front	Type <u>Kawahara 35</u>	Rear	Type <u>Kawahara 35</u>
	Dia.(start) <u>L 70 /R 70</u>		Dia.(start) <u>L 78 /R 78</u>
	Dia.(finish) <u>L /R</u>		Dia.(finish) <u>L /R</u>

Brake pad

Black Yellow

Body


Type Serpent MS Lola-2
 Body position 10 mm



Rear spoile 10 mm

Drive ratio

Gear ratio



1st 17 / 50
 2nd 20 / 46

Pully A (25 or 26) 25T 26T

Result

Race time / Lap _____
 Best lap (1Lap) _____

Comments:

.....

